



KCM Transformer

Description : Iron core microphone transformer
Primary usage : tube microphone output, high quality direct box
Turns Ratio : 11.5:1
Gain/loss : 20 dB
Maximum Output level: 0dBu, < 1% THD

Primary coil specifications:


Inductance = 51.8 Henries
Resistance = 1,164 ohms
Wire color = Red, White

Secondary Coil Specifications:


Inductance = 4.03 Henries
Resistance = 49.6 ohms
Wire color = Green, Black

Test conditions:

Z source= 150 ohms Z load = 1500 ohms,

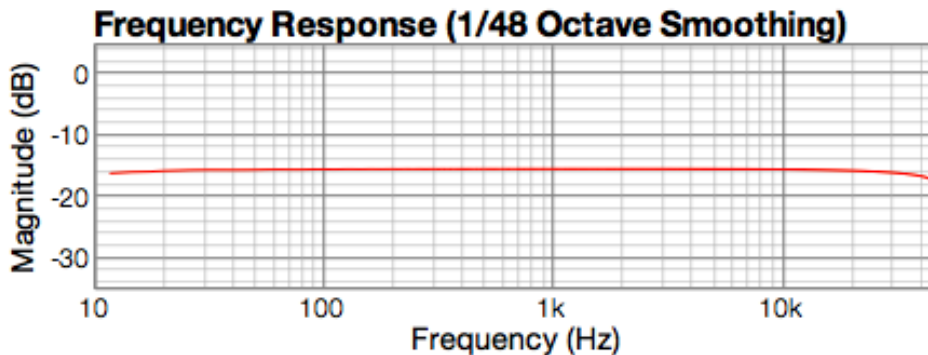

KCM, -15dBu out Into 1.5K load ■

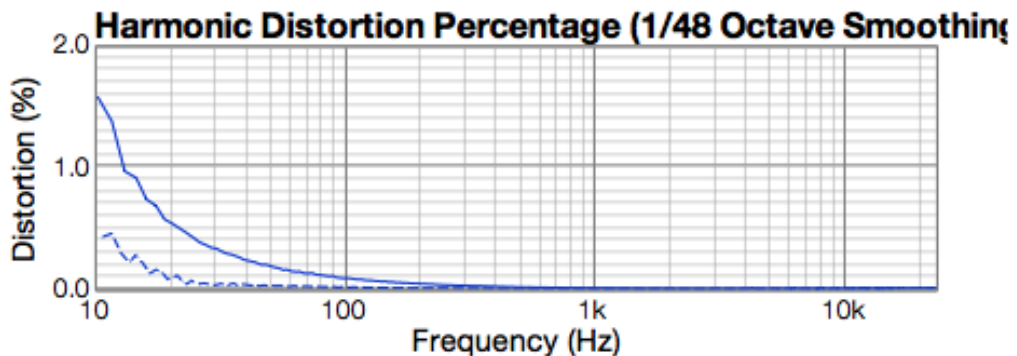

KCM, -15dBu out Into 1.5K load ■